


CURVE JAW COUPLING



3P... Curve Jaw Coupling

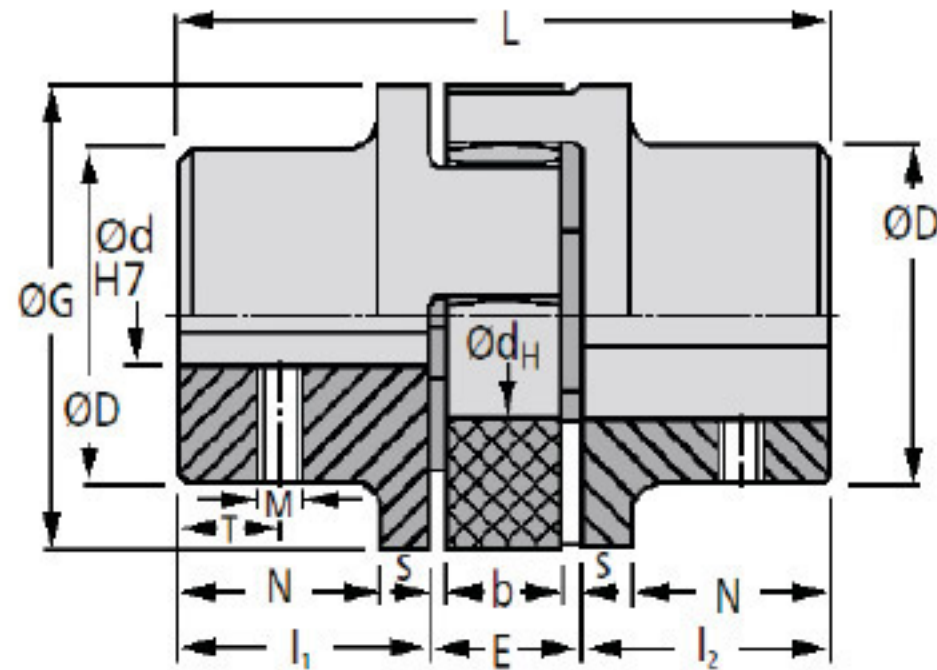

Model	Rated Torque Nm			G	D	d (Bore Min.-Max.)	M	T	N	I1-I2	S	b	E	dH	L	Weight (Kg*)
	92 Sh	98 Sh	64 Sh													
Aluminum / Cast Iron																
14	7.5	12.5	-	30	30	6-16	M4	5	-	11	1.5	10	13	10	35	0.045
19	10	17	-	41	32	6-19	M5	10	20	25	2	12	16	18	66	0.117
24	35	60	-	56	40	9-24	M5	10	24	30	2	14	18	27	78	0.24
28	95	160	-	66	48	10-28	M8	15	28	35	2.5	15	20	30	90	0.39
38	190	325	405	80	66	12-38	M8	15	37	45	3	18	24	38	114	2.06
Cast Iron																
42	265	450	560	95	75	14-42	M8	20	40	50	3	20	26	46	126	3.21
48	310	525	655	105	85	15-48	M8	20	45	56	3.5	21	28	51	140	4.41
55	410	685	825	120	98	20-55	M10	20	52	65	4	22	30	60	160	6.64
65	625	940	1175	135	115	22-65	M10	20	61	75	4.5	26	35	68	185	10.13
75	1280	1920	2400	160	135	30-75	M10	25	69	85	5	30	40	80	210	16.03
90	2400	3600	4500	200	160	40-90	M12	30	81	100	5.5	34	45	100	245	27.5
100	3300	4950	6185	225	180	50-115	M12	30	89	110	6	38	50	113	270	34.5
110	4800	7200	9000	255	200	60-125	M16	35	96	120	6.5	42	55	127	295	49.2
125	6650	10000	12500	290	230	60-145	M16	40	112	140	7	46	60	147	340	73.1
140	8550	12800	16000	320	255	60-160	M20	45	124	155	7.5	50	65	165	375	99.1
160	12800	19200	24000	370	290	80-185	M20	50	140	175	9	57	75	190	425	144.5
180	18650	28000	35000	420	325	85-200	M20	50	156	195	10.5	64	85	220	475	222.5

Type : 1



Type : 2



All dimensions are in mm unless otherwise specified. In view of our constant endeavor to improve the quality of our products, we reserve the right to alter or change specifications without prior notice.