


BEAM COUPLING




12C

12c... Beam Coupling

**Clamping Fixing
(With Relief) CB**

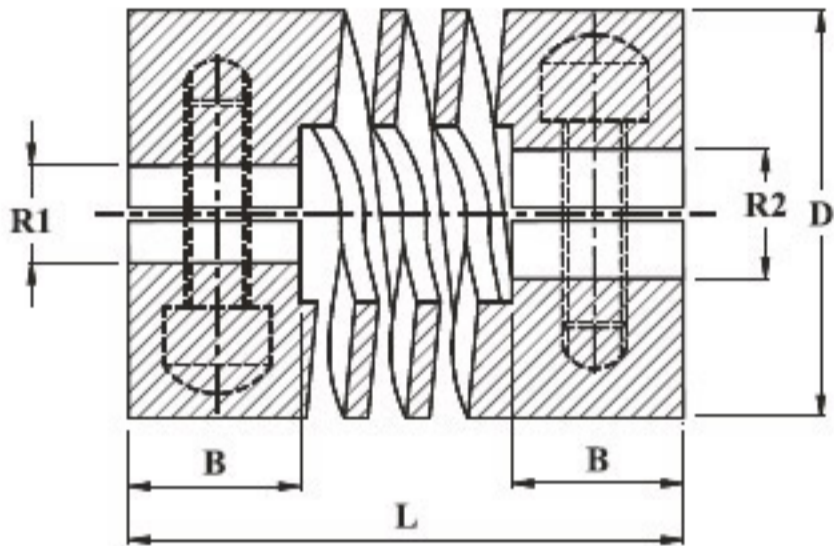

**Set Screw Fixing
(With Relief) SB**

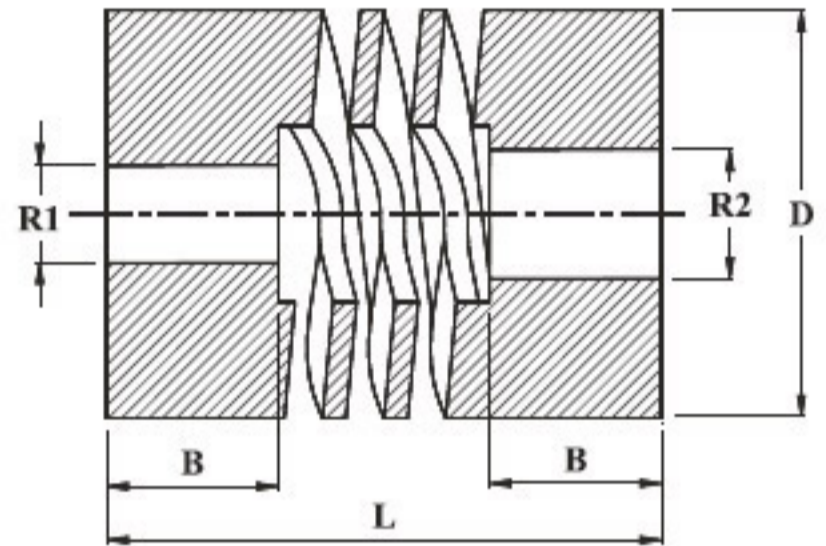

TECHNICAL DATA

Model	BORE DIAMETERS		'D' mm	'L' mm	'B' mm	Set Screw	Cap Screw	Angular Offset	Parallel Offset mm	MAX WORKING TORQUE IN Ncm
	Min R1 & R2 mm	Max R1 & R2 mm								RSB & RCB
SB15	3	6	15	20	6	M 3	-	3 Deg	0,2 to 0,3	20 Ncm
CB15							M 2,5			
SB20	3	8	20	18,20,28	8	M 3	-	3 to 5 Deg	0,2 to 0,3	25 Ncm
CB20							M 3			
SB25	6	12	25	30,32,40	8	M 3	-	3 to 5 Deg	0,2 to 0,4	30 Ncm
CB25							M 3			
SB30	6	14	30	40	10	M 4	-	3 Deg	0,2 to 0,4	40 Ncm
CB30							M 4			
SB35	6	14	35	35&40	10	M 4	-	3 Deg	0,2 to 0,4	50 Ncm
CB35							M 4			
SB40	6	16	40	40	10	M 4	-	3 Deg	0,2 to 0,4	50 Ncm
CB40							M 4			
SB50	10	20	50	60	12	M 5	-	3 Deg	0,2 to 0,4	60 Ncm
CB50							M 5			
SB60	10	25	60	80	12	M 5	-	3 to 5 Deg	0,2 to 0,4	80 Ncm
CB60							M 5			
SB70	10	25	70	95	15	M 6	-	3 to 5 Deg	0,2 to 0,4	200 Ncm
CB70							M 6			