


CHAIN COUPLING



8C... Chain Coupling

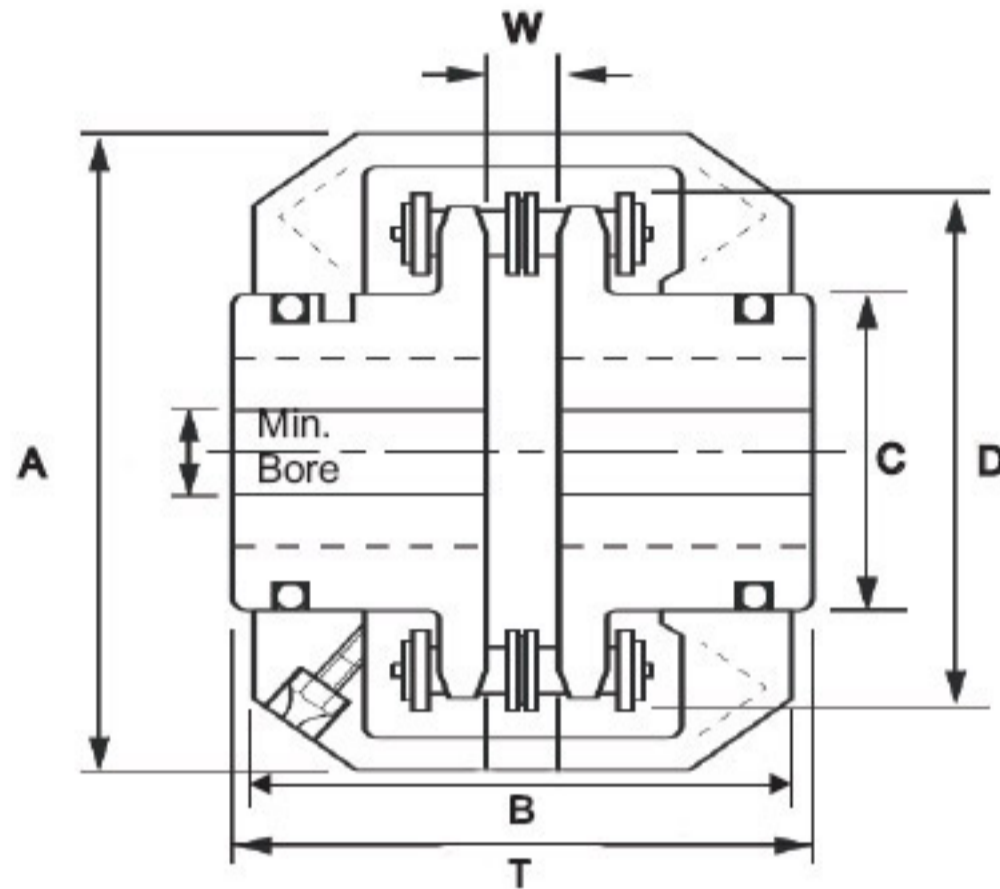

DIMENSIONS WITH ALUMINUM COVER

Model	HP @ 100rpm	Max. RPM	Min Bore	Max Bore	C	D	T	W	A	B	Approx. Wt.Kg
3812	1.08	5200	10	16	27	45	65	5	69	59	0.3
4012	2.06	4800	10	22	35	60	79	7	75	68	0.8
4014	3.35	4800	10	28	43	69	79	7	85	75	1.6
4016	4.24	4800	12	32	50	77	79	7	90	70	2.6
5014	6.37	4500	16	35	53	86	96	8	102	85	3.5
5016	8.05	3600	16	42	61	96	96	8	110	86	6.5
5018	10.20	3000	16	48	71	106	98	8	121	86	10.0
6018	19.22	2500	19	60	88	126	121	9	149	90	14.5
6020	20.39	2500	19	68	100	138	121	9	161	100	20.0
6022	25.81	2500	19	76	110	150	121	9	173	110	33.5
8018	42.57	2000	25	80	115	170	150	16	195	130	51.0
8022	61.11	2000	25	95	140	201	150	16	220	132	76.0
10020	96.13	1800	40	110	160	231	200	18	258	178	121.0
12018	144.20	1500	50	119	169	254	260	24	292	220	170.0