


JAW COUPLING



1C... Jaw Coupling

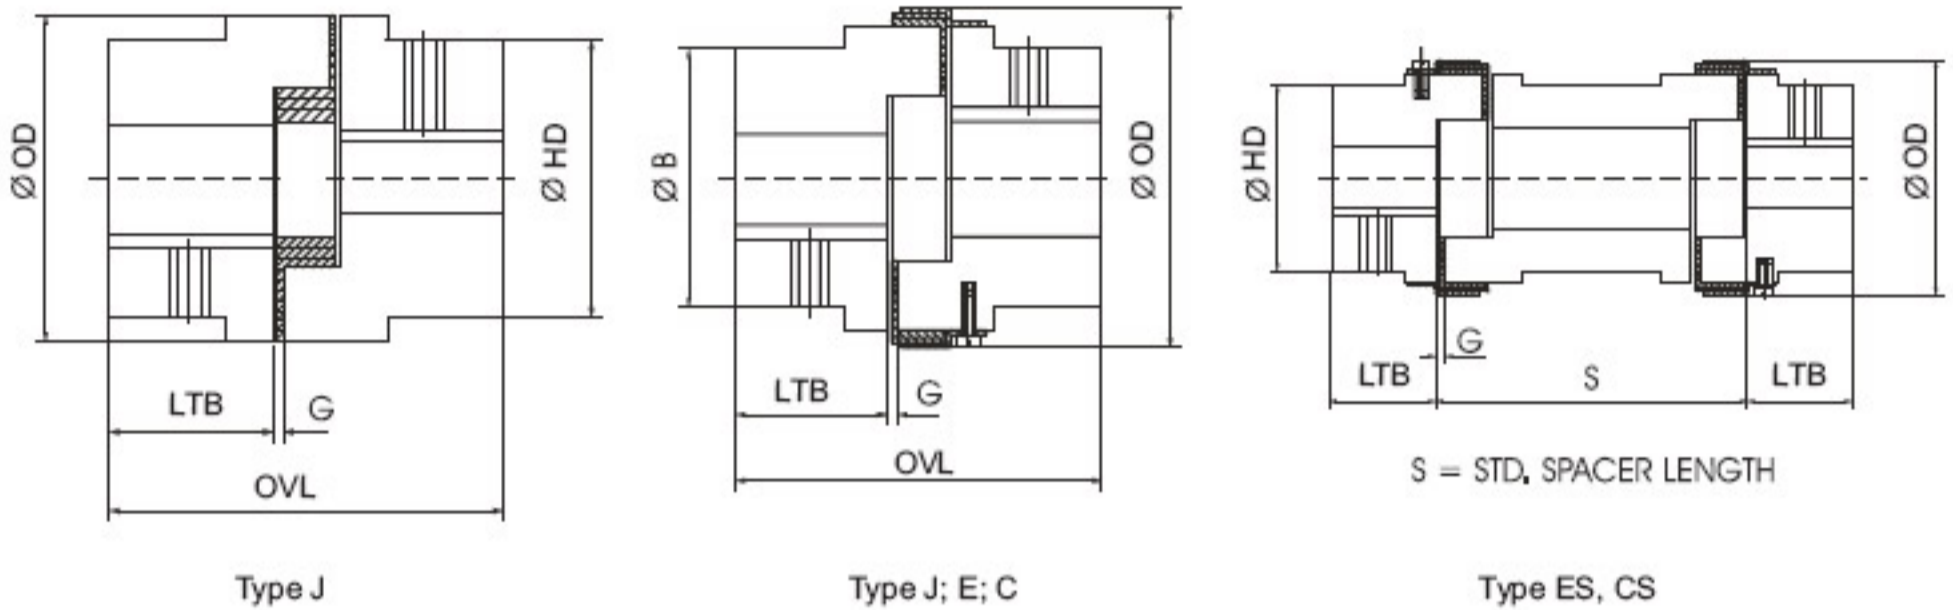

Model	Type	Torque Nm	Pilot Bore 'mm'	Max. Bore 'mm'	OD		LTB	HD	G	Std Spacer 'S'	OVL
					E, C	J					
35	J	0.38	-	10	-	16	6.5	16	1	-	21
50		2.8	5	16	-	27	15	27	1	-	42
70		1.9	9	20	-	34.5	19	34.5	2	-	51
75		9.8	9	22	-	44.5	21	44.5	2	-	55
*75		9.8	-	22	-	44.5	21	39	2	-	55
95	J E	21.1	-	28	65	54	25	49	2	90, 100,	63
99		35.1	-	30	78	65	27	51	2	140	72
100		46.4	-	35	78	65	35	57	2	90, 100, 140	88
110		59	-	42	96	85	43	76	3		108
150		141	-	48	111	96	45	80	3		115
190		190	-	80	129	115	54	102	3		133
225		265	-	85	142	127	64	111	3		153
226	C	327	25	70	153	137	70	119	3	135, 140, 180	178
276		532	25	75	173	157	80	127	3		200
280		782	30	80	208	192	80	140	3		200
295		1279	30	95	253	237	95	162	3		235
2955		2132	30	105	253	237	108	180	3		264
300		3047	30	105	272	-	115	180	3		283
350		4308	30	115	323	-	128	200	3		309

* 075 - Aluminium
075 - Sintered Iron

All dimensions are in mm unless otherwise specified. In view of our constant endeavor to improve the quality of our products, we reserve the right to alter or change specifications without prior notice.